

# VarioFlex 1U Front I/O 250

## HIGHLIGHTS

- Low power consumption
- Many network ports
- Small form factor



Figure shows configuration variant.


## Overview

<b>CHASSIS</b>	Material	Steel, powder coated
	Dimensions (WxHxD)	481 x 44 x 250 mm
	Weight	Approx. 4 kg
	Mounting	1U Rackmount, no rails necessary
<b>DETAILS</b>	Motherboard form factor	Mini-ITX
	CPU	Intel® Atom™
	TDP	Up to 35 W (active cooling)
	Expansion slots	1x full height riser
	Cooling	Active
	Fans	Up to 3x 40 mm
	Storage	1x 2.5" installed internally
	Front I/O	LED, I/O ports
<b>POWER SUPPLY</b>	Voltage	9-24 V DC, 100-240 V AC
<b>CUSTOMIZING</b>	Appearance	<b>DEFAULT</b> Powder coated with RAL 9005 (black) <b>OPTION</b> Powder coated with any RAL colour <b>OPTION</b> Front bezel printing <b>OPTION</b> Custom external packaging
	Product certification	<b>DEFAULT</b> CE <b>OPTION</b> e.g. UL, FCC, CCC, EAC etc.

# VarioFlex 1U Front I/O **250**

## Dimensions (in mm)

Figure shows configuration variant

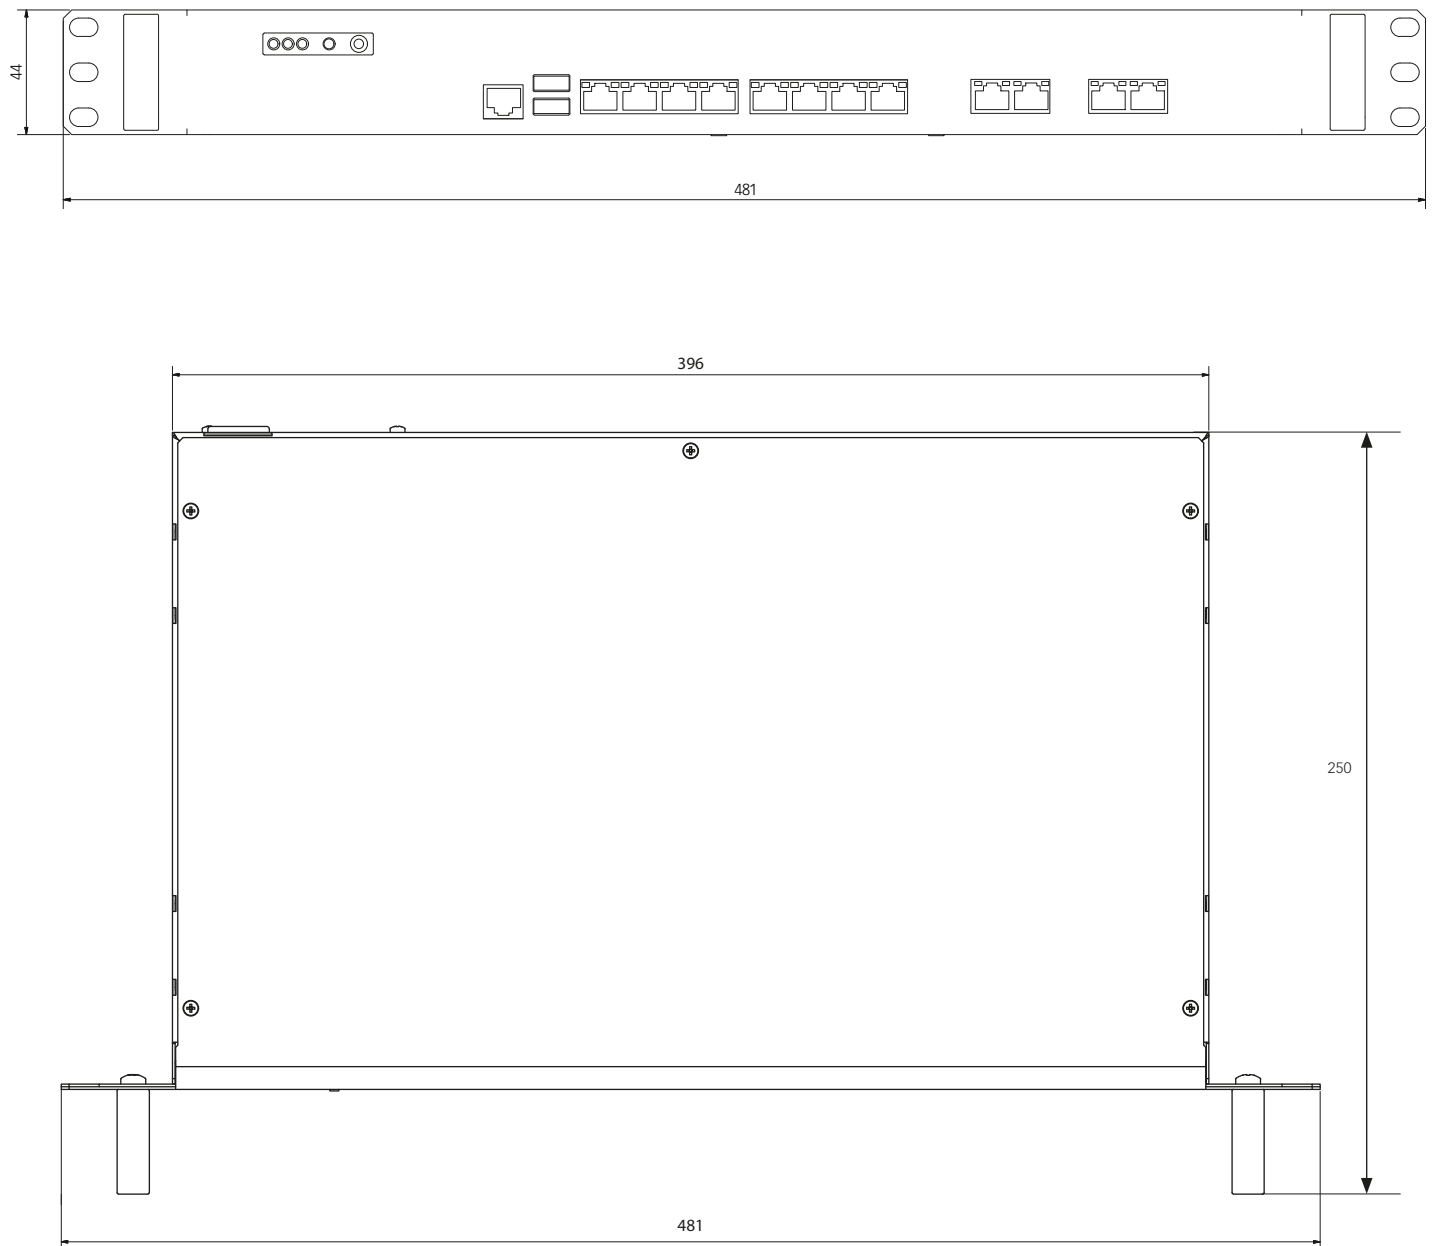

ds\_VF\_1U\_Front\_IO\_250\_EN · 18.02.20 · specification is subject to change