

VarioFlex 1U Front I/O 350

HIGHLIGHTS

- Full size expansion slot
- Up to 6 chassis fans



Figure shows configuration variant.


Overview

CHASSIS	Material	Steel, powder coated
	Dimensions (WxHxD)	481 x 44 x 350 mm
	Weight	Approx. 6 kg
	Mounting	1U rackmount with rails
DETAILS	Motherboard form factor	ATX
	CPU	From Intel® Core™ i3 up to Intel® Core™ i7/Xeon™ E
	TDP	Up to 70 W
	Expansion slots	1 x full height riser
	Cooling	Active
	Fans	Up to 6 x 40 mm
	Storage	Up to 2 x 2.5" SSD/HDD, installed internally
	Front I/O	LED, I/O ports, power connector
POWER SUPPLY	Voltage	9-24 V DC, 100-240 V AC
CUSTOMIZING	Appearance	DEFAULT Powder coated with RAL 9005 (black)
		OPTION Powder coated with any RAL colour
		OPTION Front bezel printing
Product certification	DEFAULT CE	
	OPTION e.g. UL, FCC, CCC, EAC etc.	

VarioFlex 1U Front I/O 350

Dimensions (in mm)

Figure shows configuration variant

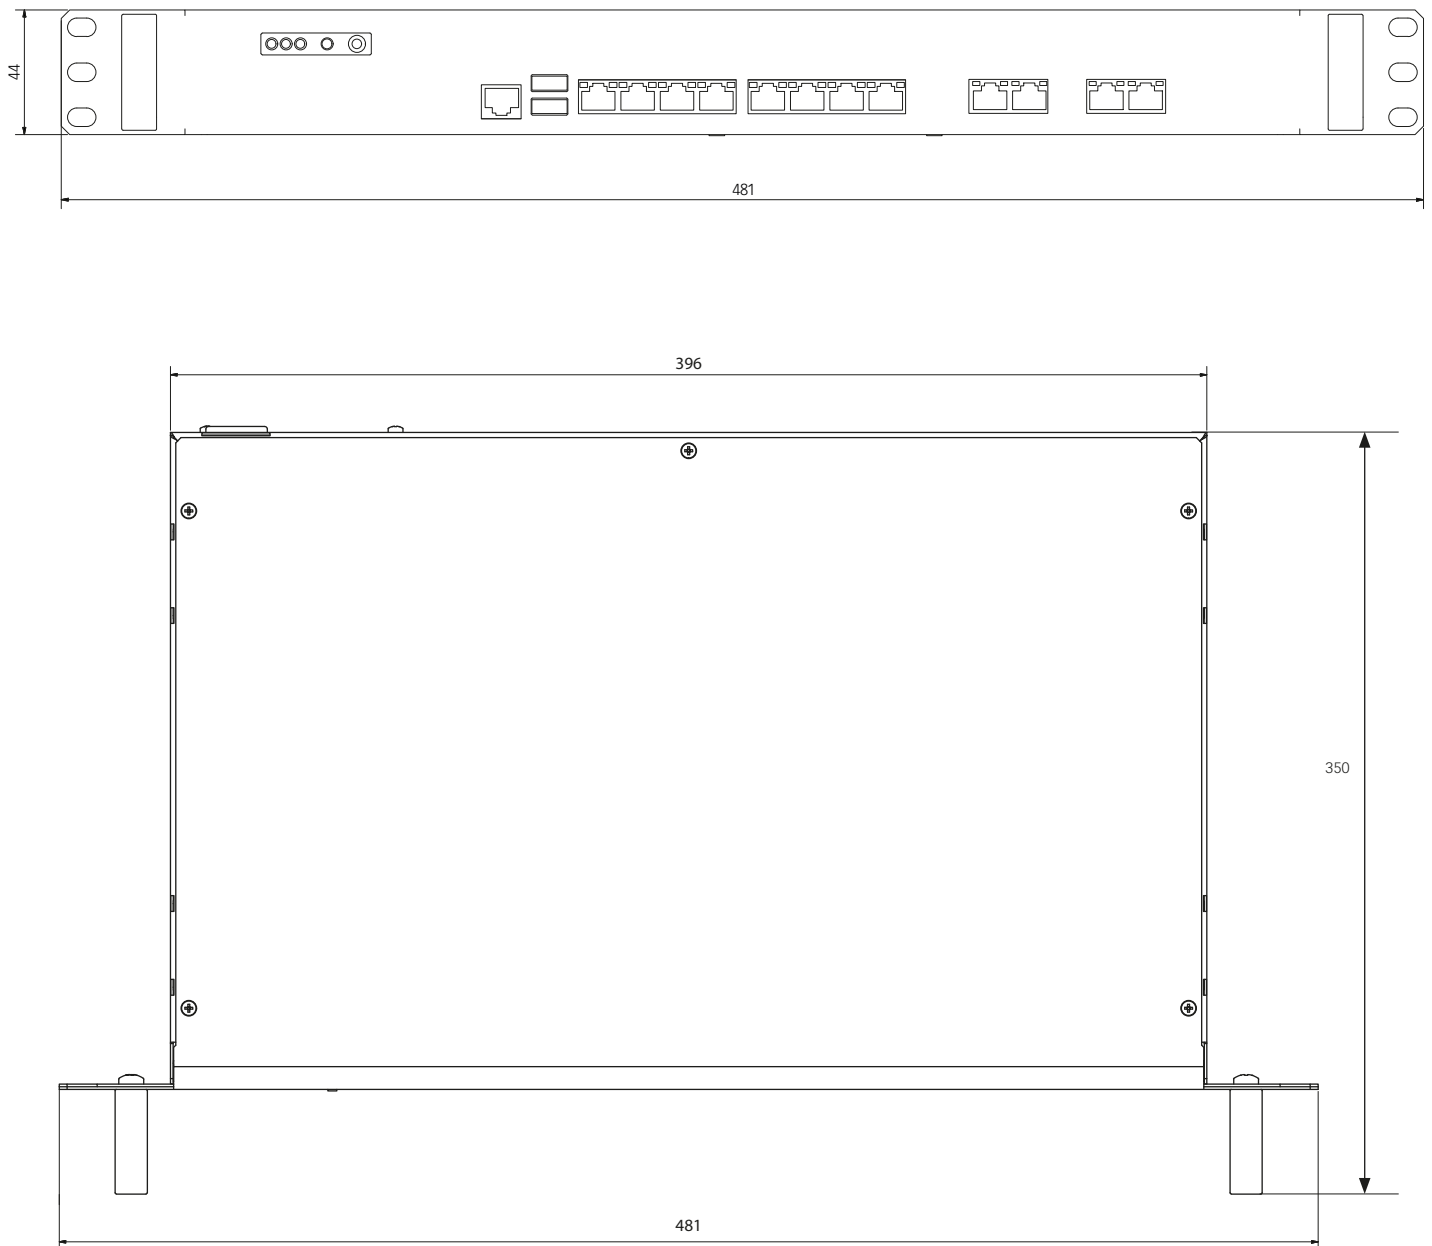

ds_VF_1U_Front_IO_350_EN · 18.02.20 · specification is subject to change