

VarioFlex 2U Front I/O 430

HIGHLIGHTS

- Redundant power supply
- Upgradable to dual socket CPUs
- Up to E-ATX mainboards



Figure shows configuration variant


Overview

CHASSIS	Material	Steel, powder coated
	Dimensions (WxHxD)	482 x 88 x 430 mm
	Weight	Approx. 12 kg
	Mounting	2U rackmount, fully extendable telescopic rails
DETAILS	Motherboard form factor	µATX, ATX, E-ATX
	CPU	Intel® Core™ i7/Xeon™E/ Xeon™W/scalable
	TDP	Up to 140 W
	Expansion slots	7 x half height
	Cooling	Active
	Fans	Up to 3x 80 mm
	Storage	Up to 2 x 2.5" SSD/HDD, hot-swappable
	Front I/O	LED, hot-swappable trays, I/O ports
POWER SUPPLY	Voltage	100-240 V AC
ACCESSORIES		Redundant power supply, telescopic rails, dust filter
CUSTOMIZING	Appearance	DEFAULT Powder coated with RAL 9005 (black) OPTION Powder coated with any RAL colour OPTION Front bezel printing OPTION Custom external packaging
	Product certification	DEFAULT CE OPTION e.g. UL, FCC, CCC, EAC etc.

VarioFlex 2U Front I/O 430

Dimensions (in mm)

Figure shows configuration variant

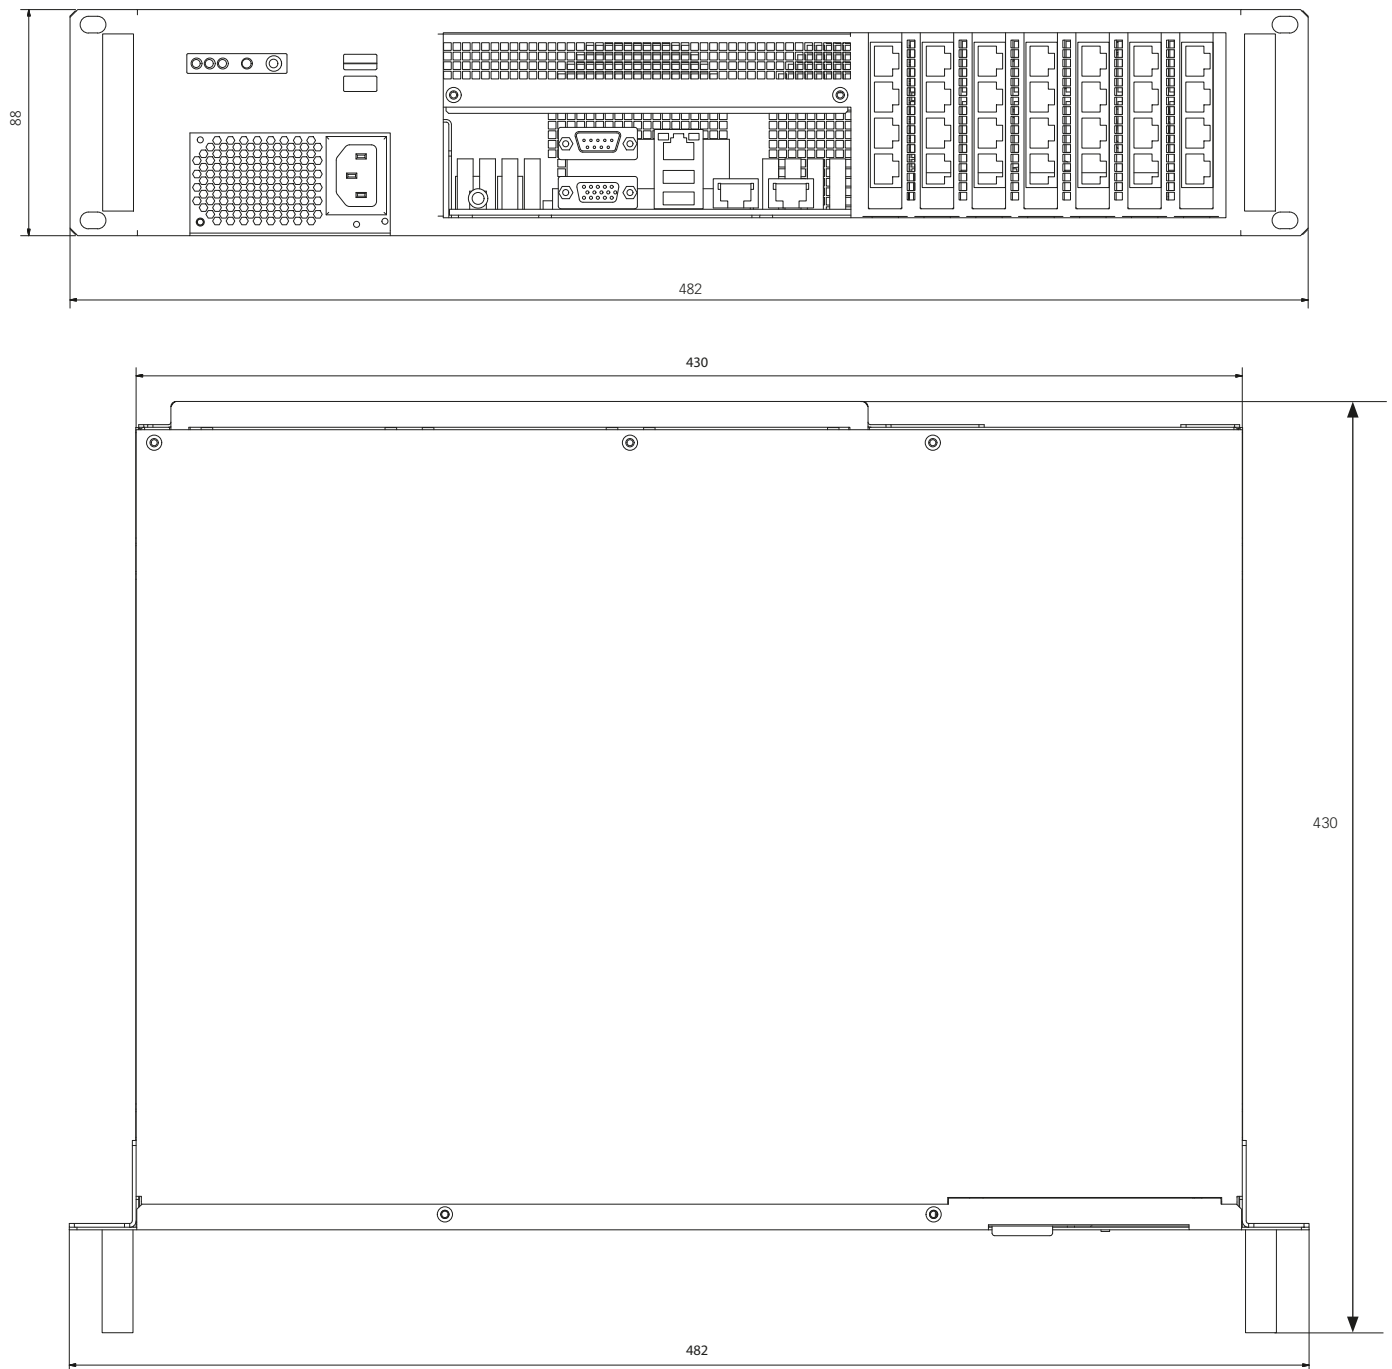

ds_VarioFlex_2U_Front_IO_430_Redundant_hinter_EN · 18.02.20 · specification is subject to change